

**Failure To Read
Instructions Will
Void Warranty**



HPS 500 PORTABLE

Pure Air Systems is delighted to introduce a portable HEPA air filtration system that stands out for its high performance and commercial-grade quality. This system, designed to meet the same stringent performance standards as our renowned line of high-volume HEPA filtration units, offers you the same level of air purity in a compact, portable form.

HIGH PERFORMANCE IN A SMALL PACKAGE

The HPS 500 unit is 13-1/4" square and 21-1/4" long and weighs only 36 lbs. This all-steel unit comes complete with a Pre-filter, Carbon filter, and a true, certified, hospital-grade 99.995% at MPPS H14 HEPA filter. Each unit has a Bluetooth air volume controller that can be set from 36 to 100% and monitors your filters, a lighted rocker on/off switch, and a 10' hospital-grade power cord. Every system comes with a foldable handle for easy transportation.

HIGH-VOLUME PORTABLE HEPA WITH AIRFLOW CONTROL

The Model HPS 500 is a versatile solution that moves up to 500 CFM. With the variable speed BCU (Bluetooth wireless) controller, you can set the airflow from 36-100% in 1% increments, giving you full control over the filtration process. The HPS 500 is the most powerful portable HEPA for its size on the market today, making it a valuable addition to any home, office, or small application.



HPS 500 portable with open inlet and fan guard on the discharge.

USE AS A PORTABLE FILTRATION SYSTEM

Please get in touch with your local Pure Air Systems dealer or Pure Air Systems directly for more information.

www.pureairsystems.com

800-869-8025

PORTABLE INSTRUCTIONS


- 1) Remove the HPS 500 from the box.
- 2) Remove the inlet cross guard from the filter section.
- 3) Remove the plastic from the Carbon filter.
- 4) Replace the inlet cross guard.
- 5) Download the Bluetooth control app. (see following two pages)
- 6) Plug the power cord into a 120V outlet.
- 7) Turn on the red-lighted rocker switch.
- 8) Open the EVO Bluetooth controller app.
- 9) Follow the controller operating instructions on the following two pages.

Evolution

Scan QR code for app



to install app in Android mobile devices.

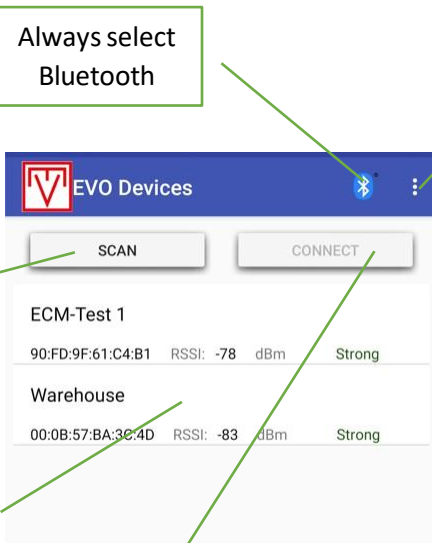

Always select Bluetooth

Android app version


1. Scan ECM-BCU controls

Connected with selected control

2. Tab to select a control in the scan list

3. Connect with selected control

Click to view status. Need user attention when in red

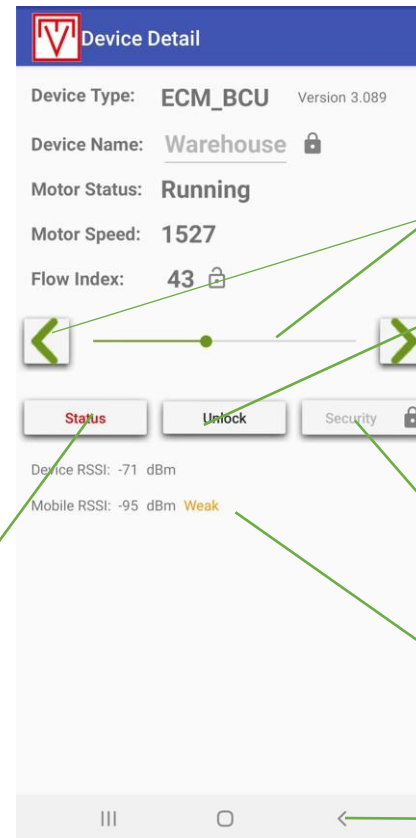

Output Control

Enter password to unlock password protected fields

Enable/Disable password protection and edit passwords

Bluetooth receive signal strength

Return to scan list

©Evolution Controls Inc.
07-Sept-2021



Field is protected by password



Field is available for modification

Scan QR code for app



Apple App Store to install app in iPhones.

Bluetooth pairing code 529413

iPhone app version

Return to scan list

Enable/Disable password protection and edit passwords

1. Start/Stop Scanning

2. Tab to connect to a control in the scan list


Connected with selected control

Click to view status. Need user attention when in red

Bluetooth receive signal strength

Output Control

Enter password to unlock password protected fields

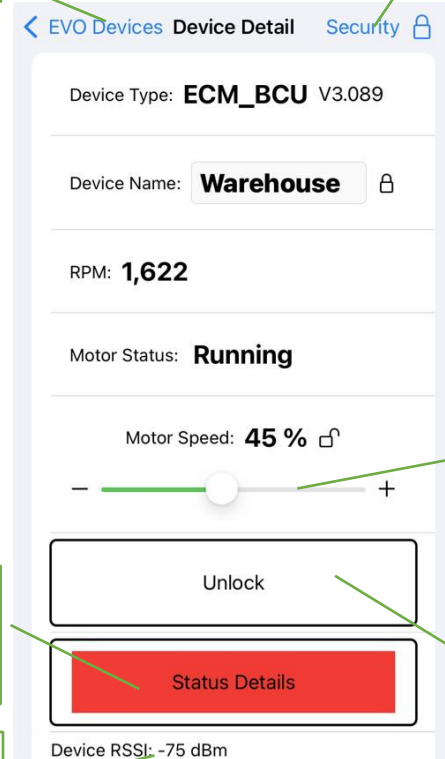

Field is protected by password Field is available for modification

ELECTRICAL WIRING & POWER CONNECTION

NOTE: ALWAYS FOLLOW ELECTRICAL CODES FOR YOUR AREA.

For our air filtration systems, we strongly recommend a dedicated 15-Amp service.

BCU CONTROLLER

The BCU wireless controller allows you to adjust the speed from 0 to 100% in 1% increments. The app will show the speed in terms of air volume capacity. See the attached EVO BCU quick startup sheets. Always turn the power off at the lighted rocker on/off switch when the unit is not in use.

For more information on the BCU controller.

[EVO/ECM-BCU](#)



TESTING THE UNIT

Open the EVO controller app to ensure the BCU wireless controller works correctly. Turn on the lighted rocker switch on the unit. The BCU controller should now be capable of adjusting the motor speed. If it does not, please check that your Android or Apple device is connected to the BCU controller.

Instruction For Replacing Filters

For the Portable HPS 500

- 1) Turn off the lighted rocker switch and unplug the power cord.
- 2) Remove the filter cross guard from the filter section.
- 3) Remove the Pre-filter and Carbon filter from the filter section (for replacing the Pre-filter or Carbon filter only skip to step 8).
If you are replacing the HEPA filter, continue to the next step.
- 4) Locate the 4 phillips head screws (Two on the left and two on the right side) and loosen them until you can carefully remove the two HEPA filter compression brackets, one on the top and one on the bottom.
- 5) Remove the HEPA filter from the unit.
- 6) Insert the new HEPA filter into the unit, with the gasket facing the motor section and the void of the HEPA filter towards the rear so that the new Carbon filter can fit.
- 7) Reinstall the two HEPA filter compression brackets and tighten the 4 phillips head screws.
- 8) Remove the clear wrap from the Carbon filter and insert it into the void of the HEPA filter.
- 9) Insert a new Pre-filter with the blue side facing the Carbon filter and the white side facing the filter cross guard.
- 10) Reinstall the filter cross guard.
- 11) Plug in the power cord and turn the lighted rocker switch.



800.869.8025 or 317.291.4341

info@pureairsystems.com

General Guidelines for Replacing Filters

Series	350, 500	350, 500	350, 500
	Pre-filter	Carbon Filter	HEPA Filter
Residential	3 Months	4 Months	2.5 Years
Commercial	Monthly	2 Months	Yearly

****Chemically sensitive customers should use the Commercial guidelines****

HPS 500 Series Data Sheet

Dimensions -S- Housing	21-1/4" x 13-1/4" x 13-1/4"
Duct Connections	8" Dia. Inlet / 6" Dia. Outlet
Portable	12" x 12" Inlet / 6" Dia. Outlet with Guard
Completed Weight	36 Lbs.
Motor/Blower Type	Forward Curved Centrifugal
Max Amps @ 120V	5
Hz	60
Phase	Single
Circuit	15 Amp
CFM After Filters	500
Pre-filter	Dual Layer
Carbon Filter Pad	Up To 1 Lbs. Activated
HEPA	Certified H14 99.995% @ MPPS
On/Off	Sealed Lighted Rocker Switch

Optional OA System

The "S" OA systems have 1 activated Carbon "OA Cartridge" in place of the HEPA filter. (up to 5 Lbs.)

www.pureairsystems.com

[1-800-869-8025](tel:1-800-869-8025)

[Email: info@pureairsystems.com](mailto:info@pureairsystems.com)

[3079 N County Rd. 200 W., Danville, IN 46122](https://www.pureairsystems.com/locations)



Pure Air Systems Limited Warranty

Your Pure Air Systems product has been manufactured, tested, and inspected according to carefully specified engineering requirements. Under the terms and conditions set forth below, it is warranted to be free from defects and workmanship.

Duration of Warranty and To Whom Extended

This Limited Warranty covers the motor for one year and the other electrical components and blower for three years. It does not cover the system filters, as they are a standard maintenance item.

Exceptions and Exclusions from Warranty

Those products that incorporate an electrical motor must be used on electrical current as indicated on the rating plate. This Limited Warranty does not apply to products that have been subject to use on electrical current other than indicated on the rating sticker of the product.

This Limited Warranty does not apply to products subject to improper, unreasonable, or negligent use, abuse, or the use of parts or accessories not approved by Pure Air Systems.

If your equipment is repaired by anyone other than those designated as authorized to perform such work, Pure Air Systems, at its sole option, may determine that this Limited Warranty will not apply.

Procedure to be taken to obtain Performance of Warranty

To secure repair of the product or any warranted parts under the Limited Warranty, the following procedures shall be taken:

- Contact Pure Air Systems or the dealer that installed your system.
- It is essential to provide Pure Air Systems with the system's model and serial numbers to ensure the product falls within the warranty time frame.
- The inoperative component (s) or warranted parts and satisfactory evidence of the purchase date must be delivered to Pure Air Systems, with shipping and delivery charges prepaid.
- Upon compliance with the above procedure, all warranted defective parts will be repaired or replaced. Pure Air Systems will pay for return shipping and replacement parts.

NO REFUND OF THE PURCHASE PRICE

Pure Air Systems will not refund the customer's purchase price as part of its Warranty Policy. This limited warranty gives you specific legal rights, which may vary from state to state.

NO CLAIMS FOR CONSEQUENTIAL OR OTHER DAMAGES WILL BE ALLOWED, AND NO OTHER EXPRESS WARRANTIES EXCEPT THOSE EXPRESSLY STIPULATED HEREIN. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. THEREFORE, THE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU.

Pure Air System
3079 N County Rd. 200 W
Danville, Indiana 46254
P: 800-869-8025
Email: info@pureairsystems.com

